

Reinforced discharge hose

SULZER

General


Blue, weather-, ozon- and wear-resistant flexible reinforced discharge hose.

Application

Light-weight hose for submersible pumps for transportation of water.

For temperatures from -25°C to +60°C.

Working pressure is calculated to be 1/3 of bursting pressure.

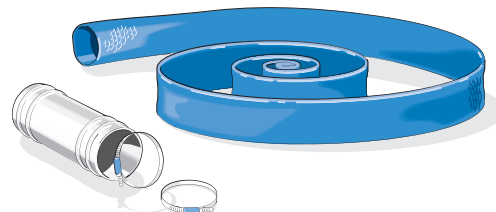

Hose available

P/N	Diameter inner	Bursting pressure MVP*	Weight kg/m	Hose length
00831020	25 mm / 1"	300	0.19	50 m
00831021	38 mm / 1 ½"	240	0.30	50 m
15030057	50 mm / 2"	240	0.41	50 m
00831022	63 mm / 2 ½"	240	0.56	50 m
15030059	76 mm / 3"	240	0.68	50 m
15030061	102 mm / 4"	210	1.00	50 m
15030062	152 mm / 6"	120	1.60	50 m
15030070	203 mm / 8"	75	2.30	25 m

*Pressure at values +20°C.

Hose clamps and jointing pipes available

Description	1"	1 ½"	2"	3"	4"	6"	8"
Hose clamp	00831020	00831019	15070047	15070019	15070027	15070066	00830829
Jointing pipe for flexible hose		00831017	15020060	15020061	15020062	15020063	15020064