

Submersible Recirculation Pump Type ABS XRCP 500

SULZER

60 Hz

Compact, submersible, stainless steel recirculation pump type XRCP is designed for pumping activated sludge in treatment plants during the nitrification and denitrification process, as well as for pumping of storm, surface and river water.

Construction

The submersible recirculation pump type XRCP is designed as a compact, water-pressure-tight unit, including propeller and bracket with well proven automatic coupling system using a single guide rail. The single guide rail coupling system guarantees quick and economical installation to DIN-flange.

The XRCP is available in stainless steel (CR).

Maximum allowable temperature of the medium for continuous operation is 40 °C (104 °F).

Motor:

Premium Efficiency, IE3 equivalent, sensorless permanent-magnet motor with high overload capacity; 60 Hz; 24-pole; 480 V* using variable frequency drive (VFD) control. Protection type IP 68, with stator insulation Class F. Start-up: variable frequency drive (VFD) Max. submergence 20 m (66ft).

* other voltages available.

Propeller:

Technically optimized, axially operating 3-blade propeller, designed to achieve high thrust and therefore a high flow capacity in an axial direction. The propeller is self-cleaning and so ensures vibration-free operation.

Solids deflection ring:

Enhanced solids deflection ring design. The patented solids deflection ring protects the mechanical seal from damage by ingress of solid or fibrous matter.

Bearings:

All bearings are lubricated-for-life and maintenance-free, with a calculated lifetime of more than 100,000 h.

Shaft sealing:

Sic-Sic, covered mechanical seal at medium side. NBR O-rings and lip seals.

Seal monitoring:

DI-system with sensors in the oil, motor, and cable connection chambers. Only one single control wire.

Temperature monitoring:

Overtemperature protection using a PTC thermistor in the stator at 140 °C (284 °F).

Cable:

10 m (33 ft) sewage-resistant, shielded, VFD power cable type 37-102VFD.

Optional lengths:

15 m (49 ft), 20 m (66 ft), 30 m (98 ft), 40 m (131ft), 50 m (164 ft).

Options:

Explosion-proof version, additional seal (Sic-C) at motor side, seals in viton.

Weight (kg):

XRCP = 200 kg (441 lbs).

VFD 5,5 kW, 7,5 kW = 14,5 kg (32 lbs), VFD 11 kW = 23 kg (50 lbs)



Materials

Part	Material
Motor housing	1.4404 (AISI 316L)
Connection chamber	1.4470 (AISI 329) (CF-8M)
Motor shaft	1.4401 (AISI 316)
Propeller	1.4571 (AISI 316Ti)
Fasteners / Motor	1.4401 (AISI 316)
Bracket	1.4571 (AISI 316Ti)


System data

Motor	PM 55/24	PM 75/24	PM 100/24
Rated power (kW/hp)	5.5 / 7.4	7.5 / 10.0	10.0 / 13.4
Motor efficiency (%)	94.0	93.3	91.7

Variable Frequency Drive (VFD)	A	B	C
Rated power (kW/hp)	5.5 / 7.4	7.5 / 10.0	11.0 / 14.8
Rated current (A) at 480 V	10.9	14.3	20.9

Total system efficiency (%) **91.5** **90.9** **89.3**

Performance curve

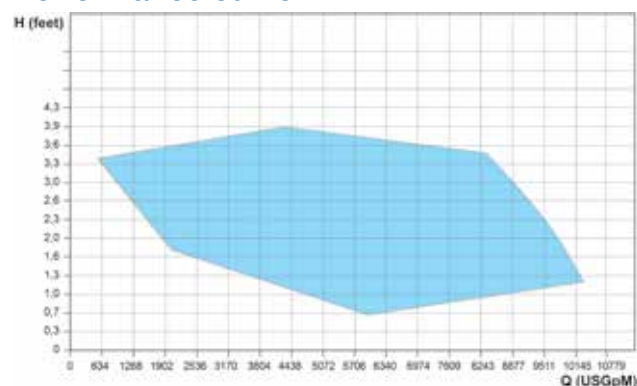

www.sulzer.com

XRCP 500 60 Hz en (02.2021), Copyright © Sulzer Ltd 2021

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.