

Submersible Recirculation Pump Type ABS RCP 500

SULZER

60 Hz

Compact, submersible recirculation pump RCP is designed for pumping activated sludge in treatment plants during the nitrification and denitrification process, as well as for pumping of storm, surface and river water.

Construction

The submersible recirculation pump RCP is designed as a compact, water-pressure-tight unit, including propeller and bracket with well-proven automatic coupling system using a single guide rail. The single guide rail coupling system guarantees quick and economical installation to DIN-flange. The RCP is available in cast iron (EC) and optional in stainless steel (CR).

Maximum allowable temperature of the medium for continuous operation is 40 °C (104 °F).

Motor:

Squirrel cage, 3-phase, 12-pole, 60 Hz. Protection type IP68, with stator insulation Class F (155 °C / 311 °F), max. submergence 20 m (66 ft).

Propeller:

Technically optimized, axially operating 3-blade propeller with very good self-cleaning effect for vibration-free operation. The propellers are designed to achieve high thrusts and therefore a high flow capacity in axial direction.

Solids deflection ring:

The patented solids deflection ring protects the mechanical seal from damage by ingress of solid or fibrous matter.

Bearings:

All bearings are lubricated-for-life and maintenance-free, with a calculated lifetime of more than 100,000 h.

Shaft sealing:

Mechanical seal: Silicon carbide / Silicon carbide.

O-rings / lip seals: NBR.

Seal monitoring:

Leakage sensors (DI) in the oil, motor and cable connection chambers.

Temperature monitoring:

TCS-Thermo-Control-System with thermal sensors in the stator which open at 140 °C (284 °F).

Cable:

10 m (33 ft) sewage resistant material.

Optional lengths (m):

15 (49 ft), 20 (66 ft), 30 (98 ft), 40 (131 ft), 50 (164 ft).

Options:

Explosion-proof version, seals in viton, cable protection sleeve, shielded cable, PTC or PT 100 in the stator, insulation class H*.

Weight:

- with motor A 60/12 - 215 kg (474 lbs).
- with motor A 90/12 - 250 kg (551 lbs).
- with motor A 120/12 - 255 kg (562 lbs).




Materials

Part	EC (cast iron) material	CR (stainless steel) material
Motor housing	EN-GJL-250, painted (ASTM A48; Class 35B)	1.4404 (AISI 316L)
Connection chamber	EN-GJS-400-18 painted (ASTM A536; 60-40-18)	1.4408 (CF-8M)
Motor shaft	1.4021 (AISI 420)	1.4404 (AISI 316L)
Propeller	1.4571 (AISI 316Ti)	1.4571 (AISI 316Ti)
Fasteners / Motor	1.4401 (AISI 316)	1.4401 (AISI 316)
Bracket	galv.steel or 1.4571 (AISI 316Ti)	1.4571 (AISI 316Ti)

Motor data

Motor	A 60/12	A 90/12	A 120/12
Rated power (kW / hp)	6.0 / 8	9.0 / 12	12.0 / 16
Rated current at 460 V (A)	17.5	24.0	31.4
Speed (min ⁻¹)	571	566	569
Motor efficiency (%)	75.2	77.6	78.3
Power factor	0.57	0.61	0.61

Performance field

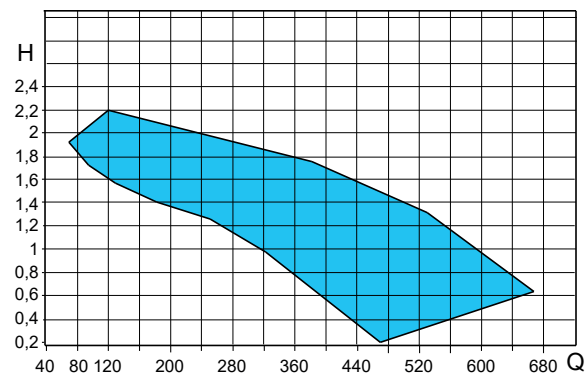

H = Total Head. Q = Discharge Volume.

www.sulzer.com

RCP 500 60Hz en (11.2022), Copyright © Sulzer Ltd 2022

This document does not provide a warranty or guarantee of any kind. Please contact us for a description of the warranties and guarantees offered with our products. Directions for use and safety will be given separately. All information herein is subject to change without notice.